

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
20 January 2005 (20.01.2005)

PCT

(10) International Publication Number
WO 2005/006319 A1

(51) International Patent Classification⁷: **G11B 7/085**

(21) International Application Number:
PCT/KR2004/001696

(22) International Filing Date: 9 July 2004 (09.07.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10-2003-0048307 15 July 2003 (15.07.2003) KR

(71) Applicant (for all designated States except US): **SAM-SUNG ELECTRONICS CO., LTD.** [KR/KR]; 416, Maetan-dong, Yeongtong-gu, Suwon-si, Gyeonggi-do 442-742 (KR).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **HAN, Moon-Soo**

[KR/KR]; 105-308 Woncheon Jugong Apt., Woncheon-dong, Yeongtong-gu, Suwon-si, Gyeonggi-do 443-757 (KR).


(74) Agent: **LEE, Young-Pil**; The cheonghwa Building, 1571-18, Seocho-dong, Seocho-gu, Seoul 137-874 (KR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: **TRACK JUMP APPARATUS AND METHOD WHICH PERFORM TRACK JUMPING CONSIDERING POSITION OF PICKUP**

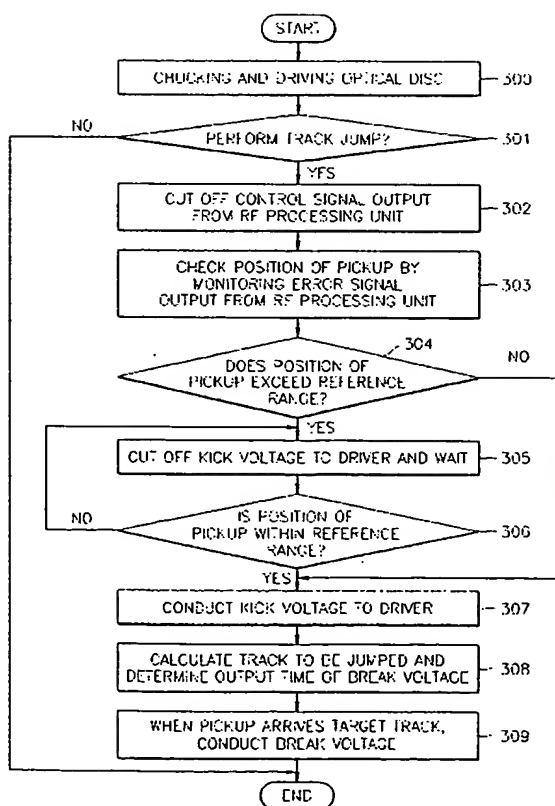

(57) Abstract: A track jump apparatus and method which perform track jumping in consideration of the position of a pickup and the position of a lens of the pickup in an optical recording medium and system with eccentricity are provided. The track jump apparatus includes: a pickup, which reads a signal from an optical disc; an RF processing unit, which outputs an error signal controlling the pickup by shaping and amplifying the signal transmitted from the pickup; a servo, which judges a position of the pickup from the error signal output from the RF processing unit and outputs a track jump start/end control signal; and a driver, which moves the position of the pickup using the track jump start/end control signal output from the servo. A track jump method by which track jumping is performed in consideration of a position of a pickup can stably perform a search operation by determining a time of the track jump considering a lens position of the pickup in an optical recording medium and system with eccentricity.

WO 2005/006319 A1



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*